


Operation Manual for Lumi LM-SxZW

(Translated from Vietnamese using Google Translate)

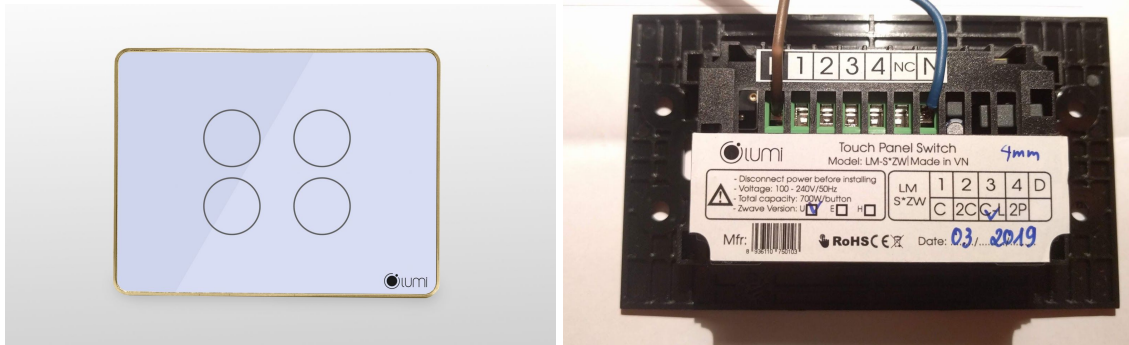

1. Single curtain control switch

This is a kind of control equipment that can not be pulled. There are two options to use, required when buying the product:

Close, open the curtain by pressing and holding hands:

User Control the curtain on / off by pressing and holding the corresponding touch switch buttons as shown. The switch will control the curtain motor to open / close until the user releases his hand from the touch button.

Opening and closing curtains without holding hands:

The touch buttons on the control switch surface The curtains are distributed as shown, with the functions of Close curtains, Stop and Open curtains.

When the user touches the sensor area, the curtain control switch will output a signal to the curtain control motor, the motor will perform closing, stopping, opening curtain according to the received signal.

In order to control the Curtain correctly, the Curtain control switch needs to be set for curtain opening / closing time. The steps to set the curtain closing / opening time are as follows:

Step 1: Pull the curtain to the fully closed position.

Step 2: Hold down the Stop button for 3 seconds until the circle indicating the Stop button turns pink.

Step 3: Press the Open button to pull the curtain motor open. During this time, the indicator button for the Open button will turn pink as well.

Step 4: Wait until the curtain is fully opened, press the Stop button to close the curtain motor. This step is to check if the curtain closing time is equal to the curtain opening time, whether the curtain is completely closed. If the blinds do not close completely, repeat the above steps with step 3 for a little longer time. If the curtain is closed completely, the curtain opening / closing time is finished.

2. Control switch Single curtain can be pulled by hand

Touch buttons on the control switch surface The curtain is distributed as shown, with the functions of Close curtains, Stop and Open curtains.

The operation of a single curtain can be pulled by hand in the same way as the operation of a single curtain control switch, the item is closed, the curtain opening does not press and hold.

3. Control switch Double curtain can be pulled by hand (Continue updating)

1. Notes before installation

1.1. Power supply:

Before starting the installation, make sure that the main power supply has been disconnected by turning the circuit breaker (atomat) to the OFF position.

The product works with AC power of 150V-230V / 50Hz, so it is imperative to have enough "hot" wires (or fire wires, "Live" wires in English) and "cool" wires (or "cool" wires, neutral wire, "Neutral" string in English).


1.2. Depth of the substrate

To ensure easy installation of the unit, it should be buried 1-2 cm deeper than the wall surface.

1.3. Distance between bases

When installing 2 or more rectangular switches close to each other:

- If the device is installed vertically together: it is required to have two negative bases buried at least 2.5cm apart.
- If installing the device horizontally: requires a sound base buried at least 3.5cm apart.

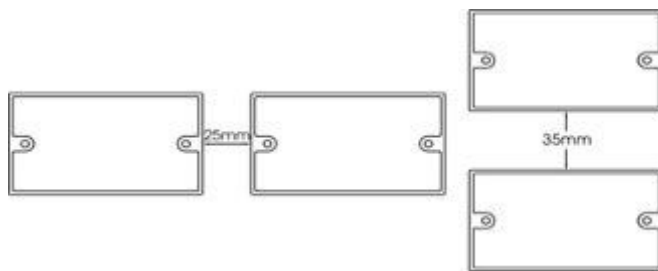

The figure depicts the distance between the negative base and the rectangular switch

When installing 2 or more square switches close together:

- If the device is installed vertically together: it is required to have two negative bases buried at least 2.5cm apart.
- If installing the device horizontally: require a sound base buried at least 2.5cm apart.

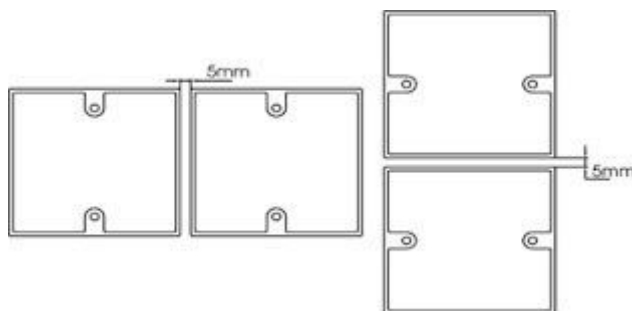


Figure depicting the distance buried negative substrate for square switches

1.4. Do not install this appliance near a hot source or in high humidity.

2. Wiring guide

2.1 . Remove the glass side

Use a 2-sided screwdriver to place in the hole on the bottom of the switch (or the side of the switch depending on the product's installation direction), then gently slide, the glass will be ejected. Removable with the body of the switch.

2.2. Wiring and fixing of products

Connect the Live (hot) wire to the "L" end, the Neutral (cool / neutral) wire to the "N" end and connect the "1, 2, ..." terminals to the equipment to be closed. interrupts or controls.

Arranging the wires in the base of the speaker ensures neat, the unconnected ends need to be insulated, ensure no fire. Then attach the switch to the negative base.

Use the supplied screws to fix the switch to the negative base, aligning it before reinstalling the glass.

Note:

The thrust of the components in the negative substrate acting on the switch should not be too great, which may harm the product.

Do not use excessive force to bend, warp the product, may cause the product to be damaged or run unstable.

2.3. Fix the glass and use

To correctly mount the glass, make sure that the four plastic pieces on the glass are aligned with the anchor hole. Once they are aligned, press the four corners of the glass flat until it is fully inserted into the wall box. Make sure the inside of the glass is in direct contact with the touch plastic surface on the body of the touch switch to ensure the device's most stable operation.

After fixing the glass panels, make sure the electrical system is fully connected, safe, and power the device to operate. The boot time of the device is 10 seconds.

References:

<http://lumi.vn/Tai-lieu-huong-dan-ct-20-299-huong-dan-su-dung-cong-tac-cam-ung-dieu-khien-re-m-don-va-rem-doi.html>

<http://lumi.vn/Tai-lieu-huong-dan-ct-20-298-huong-dan-lap-dat-cong-tac-cam-ung-lumi.html>