




PIR-200

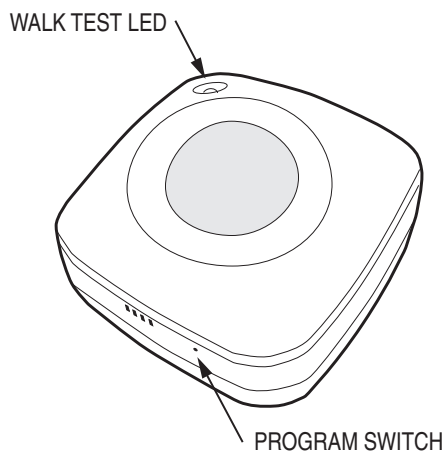

* Actual device photo unavailable at this time

Product

Motion Sensor

Description

The PIR-200 Motion Sensor is designed to monitor guest rooms and suites where furniture layout may block a wall-mounted detector's line of sight. The Sensor combines state-of-the-art optic design with advanced detection algorithms while covering up to 130 feet line of sight. Low battery signaling allows for efficient power management and prolonged battery life. In addition, each Sensor is constantly monitored for tampering and reports to the receiver. This device is typically used in conjunction with the DS-100 and complies with US and European standards.

Specifications

- SKU: PIR-200
- Supported Networks:
 - Z-Wave – Signal (Frequency) 908.42 MHz
- Range: Up to 130 feet line of sight
- Power: (2) AAA batteries
- Dimensions: 2.25" H x 2.25" W x 1.5" D
- Weight: 1.4 oz. (w/o batteries)

Installation

The PIR-200 can be mounted on a wall, ceiling or on a table top. This can be done using a piece of double-sided tape (included) to the flat area on the back of the PIR housing.

1. Remove the rear cover and insert two AAA batteries. Replace the rear cover.
2. Press the program switch. The Walk Test LED will flash 5 times if the sensor has not been "included" in a Z-Wave network. If the LED flashes once, the sensor has already been "included".

Installation Cont'd

