

Specification

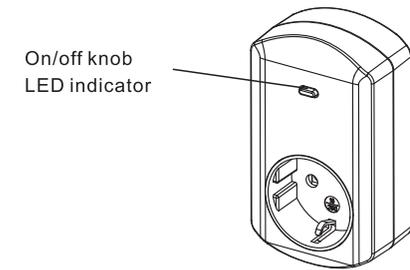
Operating Voltage	230V/50Hz
Maximum Load	300W
Range	Up to 30 meters line of sight between the Wireless Controller and /or the closest Z-Wave receiver module
Frequency Range	868.42MHz (EU), 908.42MHz (US), 921.42MHz (AU), 869MHz (RU)



Warning:

1. Do not dispose of electrical appliances as unsorted municipal waste, use separate collection facilities.
2. Contact your local government for information regarding the collection systems available.
3. If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.
4. When replacing old appliances with new ones, the retailer is legally obligated to take back your old appliance for disposal at least for free of charge.

TZ67 Smart dimmer plug in switch



This plug-in ON/OFF Switch is a transceiver which is a Z-Wave enabled device and is fully compatible with any Z-Wave enabled network. Z-Wave enabled devices displaying the Z-Wave logo can also be used with it regardless of the manufacturer, and ours can also be used in other manufacturer's Z-Wave enabled networks. Remote on/off control of the connected load is possible with other manufacturer's Wireless Controller. Each switch is designed to act as a repeater. Repeaters will re-transmit the RF signal to ensure that the signal is received by its intended destination by routing the signal around obstacles and radio dead spots.

Adding to Z-Wave™ Network

In the front casing, there is an On/Off button with LED indicator which is used to toggle switch on and off or carry out inclusion, exclusion, reset or association. When first power is applied, its LED flashes on and off alternately and repeatedly at 1-second intervals. It implies that it has not been assigned a node ID and cannot work with Z-Wave enabled devices.

The table below lists an operation summary of basic Z-Wave functions. Please refer to the instructions for your Z-Wave™ Certificated Primary Controller to access the Setup function, and to include/exclude/associate devices

Function	Description	LED Indication
No node ID	The Z-Wave Controller does not allocate a node ID to the Switch.	1-second on, 1-second off
Add	1. Have Z-Wave Controller entered inclusion mode. 2. Pressing On/Off button three times within 1.5 seconds will enter inclusion mode.	Press On, for off Press Off, for on
Remove	1. Have Z-Wave Controller entered exclusion mode. 2. Pressing On/Off button three times within 1.5 seconds will enter exclusion mode.	Press On, for off Press Off, for on

	Node ID has been excluded.	1-second on, 1-second off
Reset	1. Pressing On/Off button three times within 1.5 seconds will enter inclusion mode.	Press On, for on Press Off, for off
	2. Within 3 second, press On/Off button again for 5 seconds until LED is off.	
	3. IDs are excluded.	1-second on, 1-second off
Association	1. Have Z-Wave Controller entered association mode. Or Pressing On/Off button three times within 1.5 seconds will enter association mode	Press On, for on Press Off, for off
	2. There are only one group for the switch(it can be max. associated by five devices)	
<p>※Including a node ID allocated by Z-Wave Controller means Add. Excluding a node ID allocated by Z-Wave Controller means Remove.</p> <p>※Failed or success in including/excluding the node ID can be viewed from the Z-Wave Controller.</p> <p>※Association:it can be associated by Z-Wave devices with association</p> <p>※Use the“Reset” procedure only in the event that the network primary controller is missing or otherwise inoperable</p> <p>※ The group identifier is “Group 1”.</p> <p>Association group info report command class Profile:General lifeline (Profile MSB=0,Profile LSB=1) Association group name report command class Group 1:lifeline</p>		

Programming

The ON/OFF knob allows the user



- Turn on or off the load attached
- Include or exclude the switch from the Z-Wave system
- If the button is constantly pressed the light will be dimmed. The dimming function will also toggle Constantly pressing the button the Lamp Module will dim either UP or DOWN until it reaches the maximum or minimum value. The second time the button is held down. the dimming will change direction When the power level reaches either full power or minimum power the dimming will stop until the button has been released and is pressed again.
- The blue indicator LED will turn ON, and the load plugged into the module will turn OFF. The LED will act as a night light. This is factory default setting. If you want to change it. please add the“config 1”, set the value to “1”, it will be ok.

Troubleshooting

Symptom	Cause of Failure	Recommendation
The Switch not working and LED off	1.The Switch is not plugged in to the electrical outlet properly 2. The Switch is out of order	1.Check power connections 2. Don't open up the Switch and send it for repair.
The Switch LED illuminating, but cannot control the ON/OFF Switch of the load attached	Check if the load plugged into the Switch has its own ON/OFF switch	Set the ON/OFF switch of the load attached to ON
The Switch LED illuminating, but the controller cannot control the Switch	1.Not carry out association 2.Frequency interference	1.Carry out association 2.Wait for a while to re-try

Socket Type

Since the socket type for each country in Europe varies, refer to the outline for each socket suited for each country as follows:

TZ67G	Germany	TZ67E	U.K
			
TZ67F	France	TZ67C	Universal
