

3 Gang In-wall Switch (GR-B3-3)



Foreword

Thanks for using our 3 gang in-wall switch. Which adopts Z-Wave technology, and it is compatible with all z-wave devices. Each can be regarded as the signal repeater station. Furthermore, it can form into cellular network and generates multi-routes.

Specifications

Item Number: GR-B3-3

Telecommunication Technology: Z-Wave

Frequency: 868.42Mhz/908.42Mhz/921.4Mhz

Rated Voltage: AC100V/60Hz - 240V/50Hz

Power Load:

(1) AC100V-120V K1<10W-300W, K2 < 300W, K3 < 300W

(2) AC220V-240V K1<10W-400W, K2 < 600W, K3 < 600W




Do not operate when the switch linked-up with electricity. Improper usage or installation may lead to casualty or poverty loss. Please ask professional technician to install the devices.


allinxi.com

Installation

1.If the wire with single live line only, wiring diagram as below (please use our Bypass);

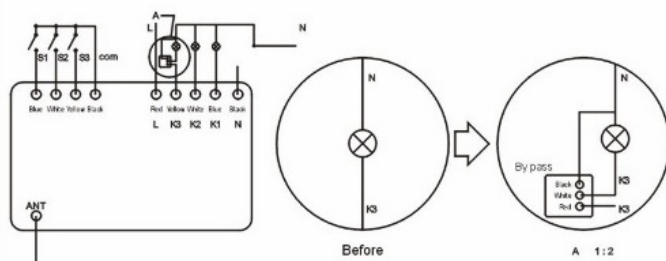

2.If the wire with null line and Live line, wiring diagram as below:

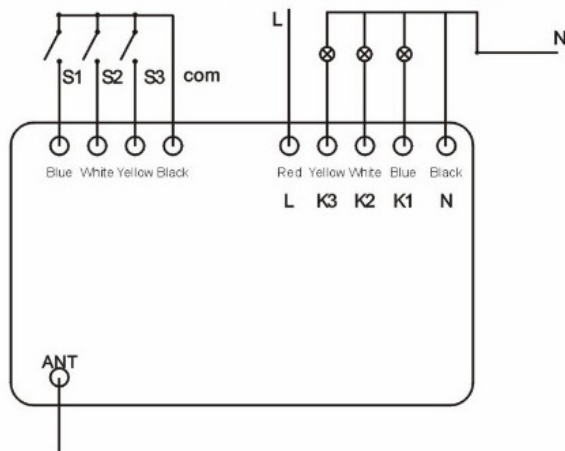

3. Adding/Removal device:

Switch controller to adding/removal mode (please refer to controller user manual), adding /removal button, quickly press the on-off switch button six times; that means to turn on and off the light three times. Attention: when device in adding/removal operation, it is suggested that keep the device with controller less than 1 meter. The two group lamps must be shut off before adding/removal. Repeat the step if adding/removal failed. Please read controller/gateway manual to see how to add/remove devices. The general rule is that when controller/gateway gives a signal to add/remove device, the device need to reply a signal as an answer.

Disclaimer

- Please confirm the load of lamps before installation, we take no responsibility if it is damaged because of over loaded.
- The black wire COM of the in-wall switch should be connected with the L line. We take no responsibility for the switch damage caused by wrong connection.
- Disclaimer: We take no responsibility for casualty because of improper line connecting. If upgrading the product on software, you can contact with our company, the company reverses the right to interpret the regulation.

allinxi.com