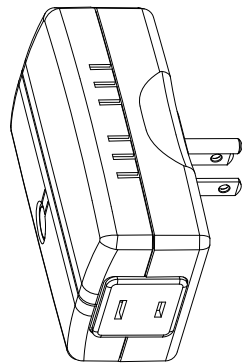


INSTALLATION INSTRUCTIONS

ZWN-323M

Wireless Home Automation Control Device
Plug-in Smart Meter
Dimmer Module

◆ SPECIFICATIONS

Voltage..... 120VAC, 60Hz
 Incandescent.....300W
 Frequency..... 908.42 MHz
 Operating Temperature..... 32°F-104°F
 Range.....Up to 100 feet line of sight
 between the Wireless Controller and the closest Z-Wave receiver module.

◆ FEATURES

- Ease of installation(no new wiring)
- One Z-Wave controlled and one always-on AC outlet
- Provides manual/ remote ON/OFF & Dim control of lamps connected
- Interoperable with other Z-Wave enabled devices
- Acts as a Z-Wave repeater to extend the range of Z-Wave network
- Compatible with any incandescent, dimmable CFL and LED bulb and small appliance
- Measures energy usage of any connected appliance/device

◆ DESCRIPTION

This ZWN-323M Dimmer Module is a Z-Wave enabled device and fully interoperable with other Z-Wave certified device. In a Z-Wave network, ZWN-323M enable you to remotely ON/OFF&Dim control a Z-Wave controlled outlet for the lamp and a always-on AC outlet for other device. ZWN-323M also acts as a repeater, retransmitting the RF signal from one device to another until the intended device is reached. With a horizontal design, the ZWN-323M plug-in dimmer module will not block other nearby AC outlets.

The LED dimming performance may vary based upon dimmer type, model, manufacturer, circuit wiring and circuit loading.
 No specific recommendation on product selection and there are no warranties of performance or compatibility implied.

◆ MEASURE THE ENERGY USAGE

The ZWN-323M Smart Meter Module enables you to measure the energy usage of your appliance. When added to a Z-Wave network, the Smart Meter Module reports real time data to your gateway or controller. It can also display actual consumption (in W) and the accumulated power used

(in kWh) in the user interface of the gateway/remote. Please use the gateway installation manual for specific instructions on measuring the module.

WARNINGS AND CAUTIONS


To reduce the risk of electric shock, this product has a grounding type plug that has a third (grounding) pin. This plug will only fit into a grounding type power outlet. If the plug does not fit into the outlet, connect a qualified electrician to install the proper outlet. Do not change the plug in any way.

To be installed and/or used in accordance with appropriate electrical codes and regulations. Exercise extreme caution when using Z-Wave devices to control appliances. Operation of the Z-Wave device may be in a different room than the controlled appliance, also an unintentional activation may occur if the wrong button on the remote is pressed. Z-Wave devices may automatically be powered on due to timed event programming. Depending upon the appliance, these unattended or unintentional operation could possibly result in a hazardous condition.


If you are unsure or uncomfortable about performing the installation, please consult a qualified electrician.

◆ INSTALLATION

1. Place the ZWN-323M Smart Meter Dimmer Module into an outlet.
2. Plug the desired appliance into the Z-Wave controlled outlet on ZWN-323M Smart Meter Dimmer Module.
3. Turn the knob/ program button on the lamp/ ZWN-323M module to ON position.

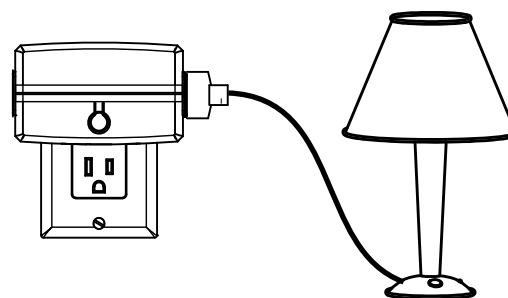

◆ OPERATIONS

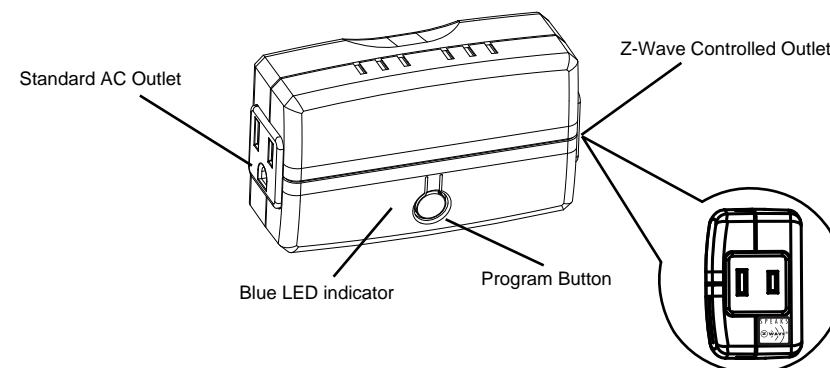

Manual Learning (Adding/Deleting)

The ZWN-323M can be added and deleted from any Z-Wave network:

1. While the gateway/remote is in the adding mode and the blue LED blinks on the ZWN-323M, press the program button on the module. The gateway or remote will verify the adding, assign a node ID number for the module and the LED will turn the module OFF on.
2. While the gateway or remote in the deleting mode, press the program button on the ZWN-323M. The gateway or remote will verify the deleting, remove the module from the current Z-Wave network, and the LED will blink on the module.

Manual Control

The Program Button on the ZWN-323M Dimmer Module allows the user to:

1. Manually turn ON the ZWN-323M Dimmer Module, press and release the program button. The blue LED indicator will turn OFF, and the lamp plugged into the ZWN-323M Dimmer Module will turn ON.
2. Manually turn OFF the ZWN-323M Dimmer Module, press and release the program button. The blue LED indicator will turn ON, and the lamp plugged into the ZWN-323M Dimmer Module will turn OFF.
3. Manually adjust the level of the connected lighting, press and hold the program button. Release the button when the desired level is reached.

Please Note: After a power failure, the ZWN-323M's Z-Wave controlled outlet returns to OFF state. A lamp (25 watts minimum incandescent, 6 watts minimum dimmable LED) can be controlled through Z-Wave controlled outlet.

Advanced Operation

The following Advanced Operation parameters require that you have an advanced controller. However, basic remotes do not have this capability.

All On/All Off

Depending upon your primary controller, the ZWN-323M Dimmer Module can be set to respond to ALL ON and ALL OFF commands in up to four different ways. Some controllers may not be able to change the response from its default setting. Please refer to your controller's instructions for information on whether or not it supports the configuration function and if so, how to change this setting.

The four possible responses are:

- It will respond to ALL-ON and the ALL-OFF command (default).
- It will not respond to ALL-ON or ALL-OFF commands.
- It will respond to the ALL-OFF command but will not respond to the ALL-ON command.
- It will respond to the ALL-ON command but will not respond to the ALL-OFF command

INSTALLATION INSTRUCTIONS

Configuration

Parameter NO.	Size	Description	Valid Value	Default Value
8	1 Byte	Instant Energy Autosend Interval (send METER_REPORT)	0: not send 1-255: 1-255 Min	Default=0
9	1 Byte	Instant Energy Autosend Interval (send SENSOR_MULTILEVEL_REPORT)	0: not send 1-255: 1-255 Min	Default=0
10	1 Byte	Accumulated Energy Autosend Interval report (send METER_REPORT)	0: not send 1-255: 1-255 Min	Default=0
11	1 Byte	Enable automatic notifications to associated device whenever the is a wattage change	0: Not report 1: Send (METER_REPORT) only 2: Send (SENSOR_MULTILEVEL_REPORT) only 3: Send both (METER_REPORT) and (SENSOR_MULTILEVEL_REPORT)	Default=1
12	1 Byte	Minimum change in wattage report	0-255: 0.0-25.5W	Default=10

◆ WIRELESS RANGE

This device complies with the Z-Wave standard of open-air, line of sight transmission distances of 100 feet. Actual performance in a home depends on the numbers of walls between the remote controller and the destination device, the type of construction and the number of Z-Wave enabled devices installed in the control network.

Things to consider regarding RF range:

- Each wall or obstacle (i.e.:refrigerator, big screen TV, etc.)between the remote or a Z-Wave device and the destination device will reduce the maximum range by approximately 25-30%.
- Brick, tile or concrete walls block more of the RF signal than walls made of wooden studs and plasterboard (drywall).
- Wall mounted Z-Wave devices installed in metal junction boxes will suffer a significant loss of range (approximately 20%) since the metal box blocks a large part of the RF signal.

Effects of Home Construction on Wireless Range Between Z-Wave Enabled Devices.

Note: The distances shown in the table below are typical examples.Actual performance in your home will vary .

From the Remote (or repeating Z-Wave module) to destination device:					
Type of Construction	Wood Frame with Drywall		Brick, Tile or Concrete		
	Plastic J-Boxes*	Metal J-Boxes	Plastic J-Boxes*	Metal J-Boxes	
Number of Walls or Obstacles	0**	100’	80’	100’	80’
	1	70’	56’	60’	48’
	2	49’	39’	36’	29’
	3	34’	27’	21’	17’

Restoring Factory Defaults

All Configuration Parameters can all be restored to their factory default settings by using your primary controller to reset the device.

Over-Current Protection

Additional over-current protection is provided by an internal fuse which is not user serviceable. Check your home's circuit breakers before concluding that the product must be replaced.

◆ FCC COMPLIANCE STATEMENT

The equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment uses, generates and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help.

Operation is subject to the following two conditions:

- This device may not cause interference
- This device must accept any interference, including interference that may cause undesired operation of the device.

◆ WARRANTY INFORMATION

Our company warranties its products to be free of defects in materials and workmanship for a period of two (2) years. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue, or profit, or cost of removal, installation or reinstallation.

Apr, 2014
11015A